

ALL PRODUCTS BROCHURE





No other air filter manufacturer has a broader line of products to meet the demanding needs of an increasingly complex market.

www.airguard.com

The Industry Looks to Airguard for Leadership in Air Filtration Technology



Expert technical assistance. Ask for an audit of your air filtration systems by a factory trained Airguard representative.

Worldwide distribution network.

State-of-the-art production facilities, including ISO-9001 Certification of the New Albany, Indiana, Jeffersontown and Campellsville, Kentucky manufacturing complexes.

State-of-the-art research and testing facilities.



Airguard products...

can be found improving the quality of air around the world in hospitals, office buildings, industrial plants, laboratories, pharmaceutical facilities, schools, museums, sports arenas, residential complexes...and many more.

Other specialized products...

are used for gas turbine air intake systems dust collection, paint overspray collection, gas phase adsorption, lint, ink mist and grease collection.

No other manufacturer...

offers a broader line of products to meet your requirements for clean air and better indoor air quality backed by an experienced staff of technically qualified experts who know the air filtration business.

Our worldwide distribution network...

insures Airguard products are available anywhere you need them.

For information...

on products, pricing, performance, applications or technical assistance, contact your authorized Airguard representative.

To find out more about Airguard, visit our web site: www.airguard.com

EFFICIENCY SELECTION GUIDE

Arrestance	⁽¹⁾ Efficiency	⁽²⁾ MERV rating	Filter Type	Airguard Product Selection	
60 - 80%	Less Than 20%	MERV 1 - 4	Disposable Panel Filters Permanent Metal Filters Fiberglass Media Latex Coated Natural Fiber Media Foam Media Automatic Roll Media	Disposables Types HS, HD Standard Grade Permalast® Foam Media Types CF, DSF	
80 - 90%	Less Than 20%	MERV 5	Disposable Panel Filters Synthetic Media Automatic Roll Filter Media	Tri-Plex 85® StreamLine™ Polyester Media Types YTS, SHP, DMC, DL-1, DL-2	
90 - 95%	20 - 30%	MERV 6 - 7	Self-Supported Pocket Filters Ring Panel Filters Pleated Panel Filters	Activator Series (2 Ply, 3 Ply), Series N, Bio•Pure DP4-SA Bio-Pure, X-treme	
95%	30 - 40%	MERV 7 - 8	Self-Supported Pocket Filters Ring Panel Filters Pleated Panel Filters	SynPak, Ultra II Bags, DPGT, DP40, DP40-Max PowerGuard™ (MERV-11), DP Class 1, DPHT Fresh Air™, Fresh Air™ Supreme	
95 - 98%	40 - 50%	MERV 8 - 9	Extended Surface Pocket Filters	Venti-Pak® VP-4, Clean-Pak™ CP-4	
95 - 98%	50 - 60%	MERV 9 - 10	Pleated Panel Filters Extended Surface Pocket Filters Extended Surface Rigid Cell Filters	DP-65 (MERV 11) Venti-Pak VP-5, Clean-Pak CP-5 Vari-Pak, Vari-Pak Model S	
99%	60 - 70%	MERV 10 - 11	Extended Surface Pocket Filters Extended Surface Rigid Cell Filters	Clean-Pak CP-6, Venti-Pak VP-6 Bio-Pure Variflow®, Variflow SC, Variflow Compact Series, Variflow II-M, Variflow II-MC, Vari+Plus®, Vari-Pak®, Vari-Pak Model S, Bio-Pure, V-Force, Legacy	
99%	70 - 80%	MERV 12 - 13	Extended Surface Pocket Filters	Multi-Guard MG-7	
99%	80 - 90%	MERV 13 - 14	Pleated Panel Filters Extended Surface Pocket Filters	Clean-Pak CP-8, Venti-Pak VP-8, Multi-Guard MG-8, Bio-Pure	
			Extended Surface Rigid Cell Filters	Variflow, Variflow SC, Variflow Compact Series, Variflow II-M, Variflow II-MC Vari+Plus, Vari-Pak Vari-Pak Model S, Bio-Pure, Legacy 4'', V-Force	
99%	90 - 95%	MERV 14 - 15	Extended Surface Pocket Filters	Clean-Pak CP-9, Venti-Pak VP-9 Multi-Guard MG-9, Bio-Pure	
			Extended Surface Rigid Cell Filters	Variflow, Variflow SC, Variflow Compact Series, Variflow II-M, Variflow II-MC, Vari+Plus, Vari-Pak, Vari-Pak Model S, Legacy, Bio-Pure, X-treme, V-Force	
NA	95% DOP	MERV 16	Extended Surface Rigid Cell Filters	Microguard [®] 95, Vari+Plus	
NA	99.97% 99.99% 99.999% 99.9995%	NA	HEPA/ULPA Filters	Microguard 99, MicroPleat™	

(2) Minimum Efficiency Reporting Value (MERV) ratings are based on the ASHRAE 52.2 test method.

PANEL FILTERS



Delta P- DPM7

PERMANENT METAL FILTERS

Type HD - Steel Construction Type HS - Aluminum Construction Washable for repeated use Ideal for high moisture or high velocity conditions • 60 - 75% arrestance Brochure A-PERMMETAL

DISPOSABLE PANEL FILTERS

1/2", 1", 2" thicknesses

Disposables

- Fiberglass and Synthetic media Pinch frame construction with
- scrim retainer
- 65 85% arrestance Brochure A-P312, A-F312

Delta P

- Superior Grade fiberglass media
- 1" and 2" thicknesses
- Pinch frame or die cut box construction
- MERV 7

PL-24

Brochure A-DPD7, A-DPM7

Tri-Plex[®] 85

- Industrial Grade fiberglass media
- Die cut beverage board frame
- 75 80% arrestance **Brochure A-TRIPLEX**

SPECIALTY MEDIAS AND FILTERS

Select from a variety of medias and filters for specialized equipment or applications.

- Lint and ink mist collection
- Replacements for AAF PL-24 and Auto-Airmat
- Special application medias Brochure A-SPECIAL



Permalast[®] Media

- Synthetic fiber media
- 1/2", 1", 2" thicknesses
 Rigid, self-supporting
- Washable
- 50 -65% arrestance Brochure A-PERMALAST

Fiberglass Medias

- Select from three grades
- 1", 2", 4" thicknesses
- 70 90% arrestance
- **Brochure A-FIBERMEDIA**

Foam Media

- 1/4", 1/2", 1" thicknesses
- Washable
- Operates at -50°F to 250° F • 55 - 65% arrestance
- Brochure A-FOAMMEDIA

Widest variety of pleated filters available. Choose from 18 different styles.



Type DP[®] 40/ DP Max Pleated Filters

- 1", 2", 4", 6" (only DP Max) thicknesses
- Die cut beverage board frame
- 100% Synthetic media
- 15.0 (DP40), 10.0 (DP Max) pleats per foot (2")
- Mechanical MERV 8 Brochure A-DP

PowerGuard™ Filter

- 1", 2", 4" thicknesses
- Die cut beverage board frame
- 100% synthetic media
- 14.3 pleats per foot (2")
 35 40% efficiency, MERV 11 **Brochure A-POWERG**

X-treme Pleated Panel Filters MERV 7 (Mechanical) 100% Synthetic Media

- Self Supported
 Damage Resistant
- No Metal
- Fully Incinerable
- **Brochure A-XTREME**

n Building Ini

www.usgbc.com

Type DP Class 1

- Classified U.L. Class 1
- 1", 2", 4" thicknesses
- Ultrafine fiberglass media
- Available with Standard DP and DP Max pleat counts
- 35 40% efficiency



DP-gl/een • 100% Synthetic Media

• 17.5 pleats per foot (2") LEED/Green Compliant

Brochure A-DPGREEN

2" thickness

• MERV 13

- Non-flammable die cut
- beverage board frame

- Brochure A-SPECIALPLEAT



High Temperature Pleated Filters

- Operates up to 500°F
- 1", 2", 4" thicknesses
- Aluminized steel frame
- and support grid Ultrafine fiberglass media
- 35 40% efficiency Brochure A-SPECIALPLEAT

Type DP4SA

Side Access Filters

- Same construction as standard Type DP
- 4" thickness
- 1" header ontop and bottom is
- designed for side access systems
- 25 30% and 35 40%
- (Power Guard) efficiencies
- Brochure A-SPECIALPLEAT



Type DPGT

- Heavy Duty Pleated Filters
- Welded wire pleat support grid
- Pleat stabilizer fingers • 2", 4" thicknesses
- 30 35% efficiency MERV 8
- Brochure A-SPECIALPLEAT

Type DP-65, DP-85, DP-95

High Efficiency Pleated Filters for low velocity applications

- 2", 4" thicknesses
- Die cut beverage board frame
- Ultrafine fiberglass media
- Three efficiencies
- 50 55%, 75 80%, 80 85% • 4" DP-65 provides highest efficiency availavle in a pleated filter operating at 500 fpm (50 - 55%) Brochure A-SPECIALPLEAT

Mist-Defier

- High Moisture Pleats
- Moisture resistant media and frame
- MERV 7
- **Brochure A-MISTD**



EXTENDED SURFACE **POCKET FILTERS**



Clean-Pak[™] Pocket Filters

Dual layer microfine synthetic media

- Moisture resistant
- Wide variety of pocket lengths and counts
- Fail safe mechanically
- staked pocket attachment Sonic welded pocket construction
- Five efficiencies -
- 90 95%, MERV 14 80 - 85%, MERV 13
- 60 65%, MERV 12 50 55%, MERV 11
- 40 45%, MERV 10
- Self-sealing models (40 45%, 60 65%)
- U.L. Class 1 and Class 2
- Brochure A-CPAKVPAK

Venti-Pak® **Pocket Filters**

Ultrafine, high loft, microglass media

- Wide variety of pocket lengths and counts
- Fail safe mechanically
- staked pocket attachment Double lock stitched pocket formation
- Five efficiencies -
- 90 95%, MERV 14
- 80 85%, MERV 13 60 - 65%, MERV 12
- 50 55%, MERV 11
- 40 45%, MERV 10 Brochure A-CPAKVPAK





Multi-Guard® Pocket Filters

Next generation, microfine synthetic media

- · Electrostatically enhanced for higher initial efficiency
- Gradient density fiber structure -for higher dust holding capacity
- Sewn pocket construction
- Three efficiencies -
- 90 95%, MERV 15
- 80 85%, MERV 13 70 75%, MERV 12
- **Brochure A-MULTI**

6

EXTENDED SURFACE RIGID CELL FILTERS



LEED/Green Building

- Sustainable Component for a LEED/Green Building Initiative (Leadership in Energy and Environment Design)
- Exceeds LEED/Green requirement of MERV 13
- Lower Energy Cost

Legacy

- Low Resistance
- High Efficiency
- High Dust Holding Capacity
- 4" MERV 11 & 14,
- 12" MERV 11 & 15 • 100% Synthetic Media
- Noisture Resistant
- Chemical Resistant
- All Plastic Construction
- Fully Incinerable
- Light Weight
- UL 900 Class 1
- Brochure A-LEG

Vari+Plus® VP

- All plastic construction
- No metal components
- Dura-Tuff 100% synthetic media
- Fully incinerateable
- Suitable for selected corrosive or chemical environments
- Three efficiencies -90 -95%, (MERV 15) 80 - 85%, (MERV 13) 60 - 65%, (MERV 11) Brochure A-VPVP



100% Synthetic Media • Moisture and Chemical Resistant

V-Force[®]

- Fully incinerateable
- Low Resistance
- Three efficiencies -90 -95%, (MERV 15)

All Plastic Construction

Highly Durable Dura-Tuff[™]

- 80 85%, (MERV 13)
- 60 65%, (MERV 11)
- UL 900 Class 1 Brochure A-VF

/ //

Variflow®

Extended Surface Rigid Cell Filters

- Ultrafine microglass paper media
- Moisture resistant construction
 Single header, double header, no header models
- Metal and wood cell sides
- Corrugated aluminum separators
- High temperature models up to 900°F
- Three efficiencies -
- 90 -95%, (MERV 14)
- 80 85%, (MERV 13)
- 60 65%, (MERV 11)
- Brochure A-VFLOW

Variflow SC®

Same construction as Variflow, except less media

Product Bulletin A-VFLOWSC



Vari-Pak®

Extended Surface Rigid Box Filters

- Ultrafine high loft microglass media
- Pleated construction with pleat stabilizers (fingers) on both sides
- Galvanized steel cell sides
- Box construction (no header) and header models
- Four efficiencies -90 - 95%, (MERV 14)
- 80 85%, (MERV 13) 60 - 65%, (MERV 11)
- 50 55%, (MERV 10) Brochure A-VPAK

Vari+Pak® Model S

Same construction as standard Vari-Pak filters except made with dual layer, microfine synthetic media.

Brochure A-VPAK

Vari+Plus®

High Capacity Extended Surface Mini-Pleat Filters

- Ultrafine microglass paper media
- Moisture resistant construction
- Continuous bead, mini-pleat adhesive separators
- V-bank assembly of mini-pleat media packs
 Large media area, low resistance
- Large media area
 Five efficiencies
- Prive efficiencies -95% DOP, (MERV 16)
- 95%, (MERV 16) 90 - 95%, (MERV 14)
- 80 85%, (MERV 13)
- 60 65%, (MERV 11)
- Brochure A-VPLUS

Vari+Plus® MC

Vari+Plus style mini-pleat media paks contained in galvanized steel cell sides.

Brochure A-VPMC





SEPARATOR STYLE FILTERS

Microguard®

- Ultrafine microglass paper media
- Wood and metal construction
- · Gasket seal and gel seal models
- Wide variety of cell side configurations
- Corrugated aluminum separators
- Four efficiencies 95%, 99.7%, 99.9%, 99.999% on .3 microns

Brochure A-MICROGG99; 95% Brochure A-MICROG95

Microguard® SC Series

Same media and construction as standard Microguard, except fewer pleat. 99.97% efficiency

MINI-PLEAT SEPARATOR STYLE FILTERS

MicroPleat™

- Ultrafine microglass paper media
- Anodized extruded aluminum cell sides
- Gasket seal, gel seal and knife edge models
- Continuous bead mini-pleat adhesive separators
- Five efficiencies 99%, 97%, 99.99%, 99.99% on .3 microns; 99.999%, 99.9995% on .12 microns
- U.L. Class 1

Brochure A-MICROPLEAT

HIGH CAPACITY HEPA FILTERS

Microguard Separator Style

• 500 fpm @ 1.35" W.G.

• 99.97%, 99.99% efficiencies Brochure A-MICRO95

Micro-V 2000 Mini-Pleat Style

- 500 fpm @ 1.2" W.G.
- 99.97%, 99.99% efficiencies @ 500 fpm
- 99.999% efficiency @ 400 fpm
 - Brochure A-MICROPLEAT

Micro-V 2400

- 600 fpm @ 1.35" W.G.
- 99.97% efficiency





Disposable Ducted Ceiling Modules A

Anodized extruded aluminum construction


- 2' x 2' and 2' x 4' sizes
 Low profile design 5" deep. Fits into T-bar ceiling grid • Adjustable diffuser/damper
- Five efficiencies 99.7%, 99.99%, 99.999% on .3 microns; 99.999%, 99.9995% on .12 microns
- U.L. Class 1 Brochure A-MICROPLEAT












Micro+Plus Room Side Replaceable Ceiling Modules

- Permanent housing with room side replaceable **HEPA** filter
- Ducted inlet design Low Profile - 7" deep
- **Brochure A-MICROPLUS**

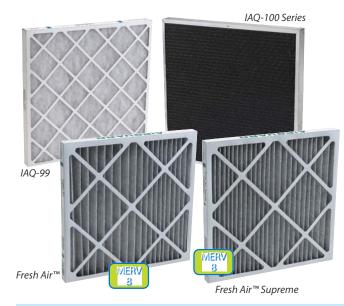

EXTENDED SURFACE FILTERS

Vari•Pure®

High Capacity Activated Carbon Filters

- Select from activated carbon, impregnated carbon, potassium permanganate or blended media
- Effective on wide variety of gases and odors
- Vari-Sock afterfilter prevents carbon dusting downstream
- 12" deep
- Brochure A-VPURE

Fresh Air™

Combination 30 - 35%, MERV 8 pleated prefilter with activated carbon

GAS PHASE ADSORBERS

- Die cut beverage board frame
- 1", 2", 4" thicknesses
 Self-supported media, no metal Brochure A-FRESH

Fresh Air™ Supreme

- Chemically enhanced carbon media
- Removes wider range of odors than standard activated carbon
- 30-35% efficiency, MERV 8
- Self-supported media, no metal Brochure A-FRESHSUPREME

IAQ-99

- Combination polyester prefilter with bonded carbon fibers
- Available with die cut beverage board frame or pad design
- 1", 2" thicknesses Brochure A-IAQ99

IAQ-100 Series

- Select from activated carbon, potassium permanganate or blended media
- Honeycomb carbon loading
- 25%, 50%, 75% and 100% fill
- Steel frame
- 3/8", 1", 2" thicknesses

IAQ-108

- Self-sealing panel construction
- Combination polyester prefilter with bonded carbon fibers

Vari•Klean™

- Ultra High Efficiency Carbon Adsorber
- Pleated media design increases carbon content
- Offers high first pass removal efficiency
 Brochure A-VKLEAN



REPLACEMENT TRAYS AND ELEMENTS

AG-12 Element

- Fits Purafil and Flanders housings
- Refillable design
- Contains 30 pounds of carbon

Available with activated carbon, potassium permanganate or blended media

Refillable Carbon Trays

- Wide variety of sizes to fit various
- manufacturers' housings
- Cold rolled steel frame

AG-18 Element

- Fits AG-22 and Purafil PC-22 housings
- Refillable and disposable models
- Contains 30 pounds of carbon

CARBON FILTER HOUSINGS



AG-2000 Front Access Housing

- 14 gauge cold rolled steel construction
- Easily removable access grid
- Contains 90 pounds of carbon (10 trays)



Side Access Housings

- 16 gauge steel construction
 Adaptor flanges to match up with
- air handling units
- 2" prefilter or after filter track Brochure A-SIDEACCESS

AG-14 Carbon Housing

- 16 gauge cold rolled steel construction
- Holds four IAQ-100 carbon panels
- Built-in prefilter and final filter tracks
- Contains 48 pounds of carbon

AG-22 Carbon Housing

- 16 gauge cold rolled steel construction
- Holds four AG-18 carbon elements
- Contains 72 pounds of carbon

AUTOMATIC ROLL FILTER MEDIAS

Choose from seven styles of media to fit major brands of auto roll equipment, including:



Airguard, AAF, Air Maze, BLC, Cambridge, Carrier, Commercial, Continental, Farr, MSA, Trane.

FIBERGLASS MEDIAS

- Progressive density media construction
- 2-1/2" thick
- Scrim mesh netting backing for high tensile strength
- Adhesive coated for high dust holding capacity
- 70 90% arrestance Brochure A-AUTOROLL, A-PBAUTO

SYNTHETIC MEDIAS

- 1/2", 1" thicknesses
- Scrim mesh netting backing for high tensile strength
- Dry and tackified medias
 70 90% arrestance
- Brochure A-AUTOROLL, A-PBAUTO



Designed for use with compatible wire basket retainers.



ANTIMICROBRIAL TREATED FILTERS

For improved IAQ applications to inhibit arowth of microorganisms on the filters.

Bio-Pure[®]...no other manufacturer has a broader line of antimicrobial treated filters than Airguard. Life cycle tests verify continued effectiveness over the life of the filter. **Bio-Pure High Efficiency Rigid Cell Supported Pleat Filters Bio-Pure Pleated Panel Filters** • Ultrafine microglass paper media • 1", 2", 4" thicknesses • 90 - 95% efficiency Available with 14.3 and • Select from two styles of construction: 10 pleats per foot (2") Corrugated aluminum separators (above left) • 25 - 30% efficiency, MERV 6 Continuous bead mini-pleat adhesive separators (V-bank media packs) (above right) **Bio-Pure High Efficiency Extended Surface Pocket Rigid Cell Box Filters Filters**



- Dual layer microfine
- synthetic media Wide variety of pocket
- lengths and counts Double lock stitched
- pocket formation Fail safe mechanically
- staked pocket attachment 90 -95%, 80 - 85%,
- 60 65% efficiencies



Bio-Pure High Efficiency

- Dual layer microfine synthetic media
- Pleated media design with pleat stabilizers on both sides
- 90 -95%, 80 85% efficiencies

PAINT SPRAY BOOTH FILTERS

Complete line of air filters for paint spray booth applications.



Type AG/FG fiberglass

INTAKE PANEL FILTERS

- Self-sealing No latches required
- Internal wire support frame
- Tackified for high particle retention
- 90 95% arrestance

Activator Series - 2-Ply or 3-Ply media construction



Poly backed paper



ATI-600

- Dual layer media construction with scrim backing
- Internal wire support frame

ATI-300

Dual layer media construction

Internal wire support frame

with scrim backing

ATI-300

PAINT ARRESTOR MEDIAS

Select from a wide variety of paint overspray collection medias

- Fiberglass
- Stackguard[®] polyester backed fiberglass
- Type AG/PS polyester
- Expanded paper
- Polyester backed expanded paper



11

AIRGUARD

RING PANELS, SELF-SUPPORTED POCKET FILTERS & POLYESTER MEDIA

47

RING PANELS, LINKS, SLIP-ONS

The Activator[™] Series Select from 2-ply and 3-ply models

- 2-Ply MERV 6 3-Ply - MERV 7
- · Self sealing, no latches required
- Tackified media
- Made from tough, polyester fibers



2-ply, MERV 6



StreamLine[™] Polyester Medias

- Select from three choices of medias 1/2", 1", 2" thicknesses
 Made from multi-denier, recycled polyester fibers
- Tackifier increases particle retention
- 85 95% arrestance




- Three ply media construction
- 15" deep, 2, 3 or 4 pockets.
 35 40% efficiency, MERV 8



477

Ultra II

- Air Flow 150 FPM
- Initial Static .05" W.G.
 Average Paint Spray Removal Efficiency 99.70% • Pads and Blankets cut to size
- Bags available in two and
- three pocket models

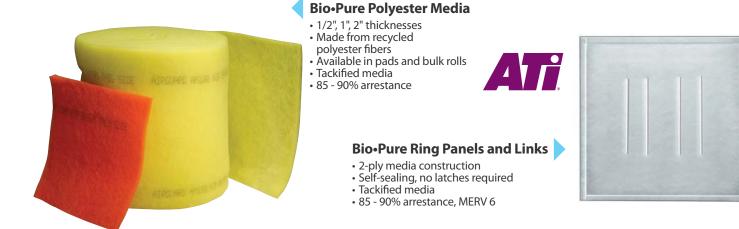

REPLACEMENT FILTERS FOR TURBOMACHINERY AIR INTAKE SYSTEMS

FINAL FILTERS FOR BARRIER FILTER SYSTEMS

PREFILTERS FOR BARRIR FILTER SYSTEMS



Vari+Plus® VP

- All plastic construction
- No metal components
- No rivets, screws, faceguards or cross bars
- Dura-Tuff 100% synthetic media resists tearing, abrasion
- Chemical and corrosion resistant
- Fully incinerateable
- V-bank assembly of minipleat media packs
- Available with Vari-Pad direct
- 90 95% (MERV 15) and 60 65% (MERV 11) efficiencies

Type DPGT Pleated Panel Filters

- 100% synthetic fiber media
- Die cut beverage board frame
- 30 35∞ efficiency, MERV 8
- Brochure A-SPECIALPLEAT

Filter Media Pads

- Fiberglass (2", 4")
 Synthetic (2")







- Ultrafine microglass paper media
- Corrugated aluminum separators
- Galvanized steel construction • Faceguards on both sides
- 90 95%, 60 65% efficiencies

Vari-Pak® GT

- High loft fiberglass or synthetic media
- Expanded metal pleat support
- Pleat support stabilizers on both sides
- 90 95%, 80 85%, 60 65% on both sides 90 95%, 80 85%, 60 65% efficiencies

HOLDING FRAMES & LATCHES



Holding Frame

Uni-Lok® Filter Holding Frames

- •16 gauge galvanized steel
- Pre-punched mounting holes
 Factory applied gaskets
- Wide variety of latches to hold all types and sizes of filters **Brochure A-UNILOK**

TYPE AG-8 Filter Holding Frames

 Replacement for Farr Type 8 frames and latches **Brochure A-TYPEAG8**

TYPE HDS HEPA Holding Frame

- Creates high integrity seal for HEPA Installations
- 16 gauge aluminized steel construction
- Two depths holds 5-7/8" or 11 1/2" deep filters
- Spring loaded clamping bolt
- **Product Bulletin A-TYPEHDS**



- Holds filter media pads
- Sized to fit inside Uni-Lok, Type AG-8 or other manufacturers' brands of filter holding frames

- 22 gauge galvanized steel frame
 1/2", 1", 2" thicknesses
 Wire support grid both sides Brochure A-SERVFRAME

RESIDENTIAL AIR FILTRATION PRODUCTS

REPLACEMENT FILTERS FOR RESIDENTIAL AIR CLEANERS

- Trion Air Bear (MERV 8)
- Honeywell (MERV 8)
- Sizes to fit all major models **Brochure A-RESIDENT**








Flat Bank Housings


- Single stage unitsHolds 2" or 4" thick filters
- 16 gauge aluminized steel construcion Brochure A-FBANK



- V-bank filter arrangement
- Holds 2" thick filters
 16 gauge aluminized steel construction Adaptor flanges for air handling units or
- ductwork arrangements Brochure A-VBANK

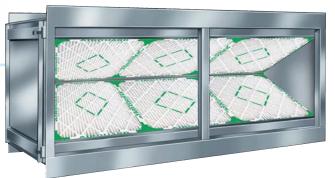

V-Bank Housing

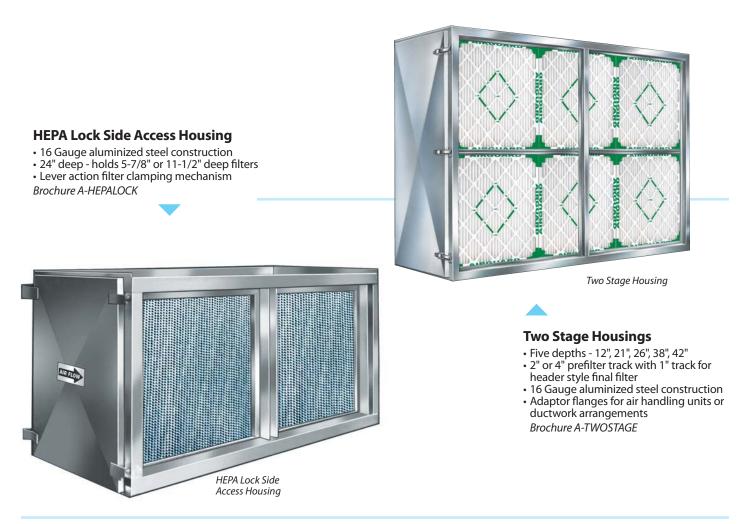

INNOVATIVE CLEAN AIR SOLUTIONS

Airguard Products Providing Clean Air for People and Processes Worldwide...



Gas Turbines

Museums

Founded in 1964, Airguard has grown to be one of the world's foremost manufacturers of air filtration products for the commercial, industrial and institutional markets.

The basic premise on which the company was founded is to provide replacement filters for all types of HVAC systems. Whatever type of air filtration equipment is installed in your facilities, Airguard can provide a direct replacement or recommend alternatives for improved indoor air quality, lower cost and longer service life. Airguard offers products in every category of air filters from disposable panel filters and pleated filters to high efficiency extended surface filters and HEPA filters. A wide variety of filters for specialized applications is also available, including paint overspray collection, lint and ink mist collection, gas phase adsorption and dust collection.

No other air filter manufacturer has a broader line of products to meet the demanding needs of an increasingly complex market.







	AG-ALL-100
Distributed by:	
© 2008 CLARCOR Air Filtration Product	
LARCOR Air Filtration Products has a policy o	

CLARCOR AIF HITRATION Products has a policy of continuous product research and development and reserves the right to change design and specifications without notice. Terms and Conditions of Sale can be accessed in the "LOGIN" section at www.airguard.com