


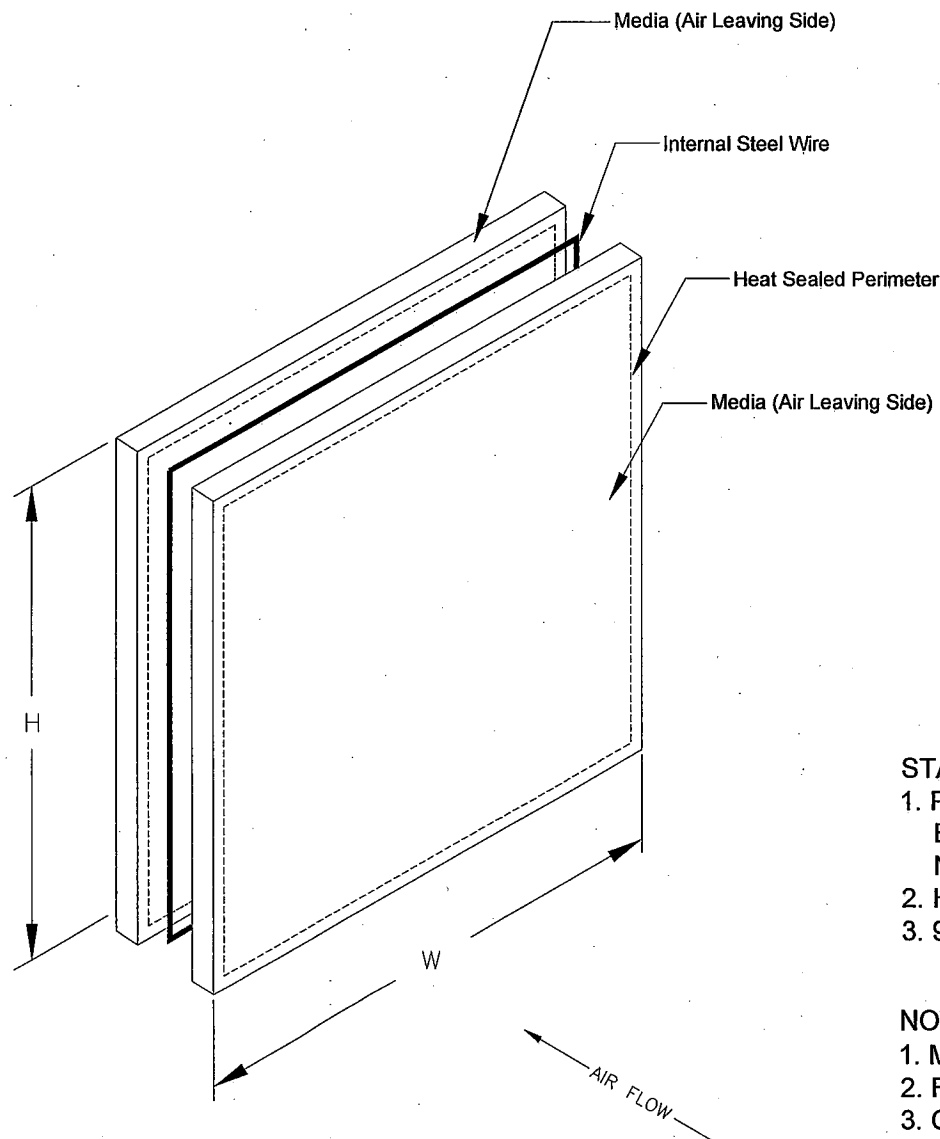

Model Number	Nominal Size (Inches) W x H	Wire Size (Inches) W x H	Initial Resistance (Inches W.G.)	
			300 FPM	500 FPM
ACT-217-CL1	10 x 20	9-1/2 x 19-1/2	.17	.35
ACT-210-CL1	12 x 24	11-3/8 x 23-3/8	.17	.35
ACT-245-CL1	15 x 20	14-1/2 x 19-1/2	.17	.35
ACT-201-CL1	16 x 20	15-1/2 x 19-1/2	.17	.35
ACT-216-CL1	16 x 24	15-3/8 x 23-3/8	.17	.35
ACT-202-CL1	16 x 25	15-1/2 x 24-1/2	.17	.35
ACT-212-CL1	18 x 24	17-3/8 x 23-3/8	.17	.35
ACT-261-CL1	20 x 16	19-1/2 x 15-1/2	.17	.35
ACT-203-CL1	20 x 20	19-1/2 x 19-1/2	.17	.35
ACT-211-CL1	20 x 24	19-3/8 x 23-3/8	.17	.35
ACT-204-CL1	20 x 25	19-1/2 x 24-1/2	.17	.35
ACT-206-CL1	24 x 12	23-3/8 x 11-3/8	.17	.35
ACT-244-CL1	24 x 16	23-3/8 x 15-3/8	.17	.35
ACT-215-CL1	24 x 20	23-3/8 x 19-3/8	.17	.35
ACT-205-CL1	24 x 24	23-3/8 x 23-3/8	.17	.35
ACT-165-CL1	25 x 16	24-1/2 x 15-1/2	.17	.35
ACT-252-CL1	25 x 20	24-1/2 x 19-1/2	.17	.35
ACT-225-CL1	25 x 25	24-1/2 x 24-1/2	.17	.35

STANDARD CONSTRUCTION:

1. Polyester Media With Tack
Blended Multi-Denier Media Layer Air Entering Side (White)
Needled Media Layer Air Leaving Side (White)
2. Heat Seal Construction
3. 9 GA Steel Internal Wire Frame

NOTES:

1. MERV 6 ASHRAE 52.2-1999
2. Final Resistance: 1.0" W.G.
3. Class 1 Filter Per U.L. Standard 900
4. Maximum Operating Temperature: 220 deg. F



1612 N DAVIS AVE
OTTAWA, KS 66067
P: 800-624-8739
F: 785-242-8700

CONTACT FACTORY TO
VERIFY REVISION LEVEL

TOLERANCES
UNLESS OTHERWISE SPECIFIED

FRACTIONAL $\pm 1/8"$
DECIMAL —
ANGLES —

ALL DIMENSIONS IN INCHES

DRAWING NAME

ACTIVATOR SERIES 2-PLY RING PANEL FILTER
UL900 CLASS 1

APPROVED BY

[Signature]

SPECIFICATION NO.

MKT-B-00514

PAGE

1 OF 1

SCALE

NONE

DWG. SIZE

A

REVISION

A

REVISION DATE

11-15-06

CONFIDENTIAL - DO NOT COPY. THIS MATERIAL IS TRADE SECRET AND PROPRIETARY BEING EXCLUSIVELY OWNED BY CLARCOR AIR FILTRATION PRODUCTS. THE EXPRESSION OF THE INFORMATION CONTAINED HEREIN IS PROTECTED UNDER FEDERAL COPYRIGHT LAWS AND ALL COPYING IS PROHIBITED AND MAY BE SUBJECT TO CRIMINAL PENALTIES.