


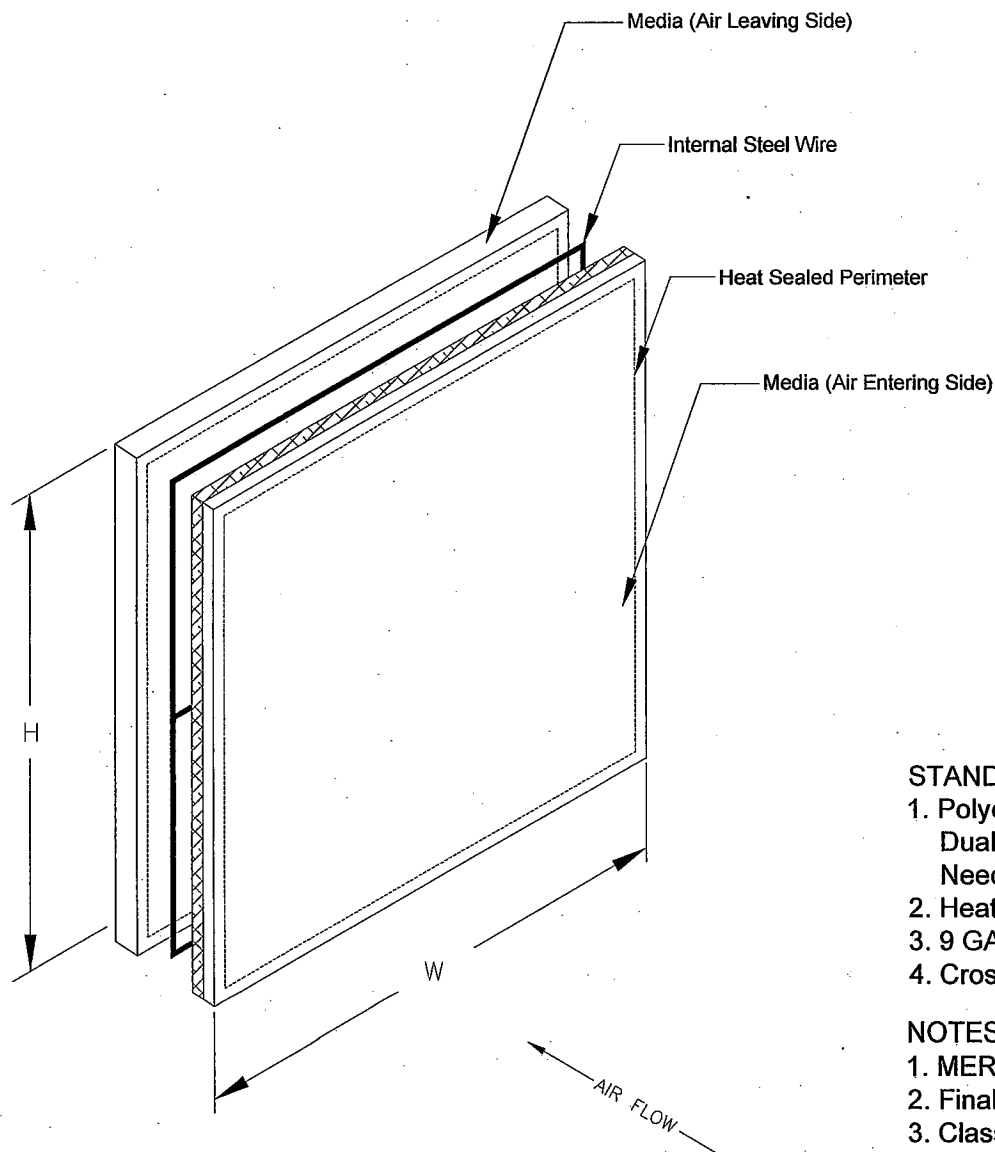

Model Number	Nominal Size (Inches) W x H	Wire Size (Inches) W x H	Number Of Cross Wires	Initial Resistance (Inches W.G.)	
				300 FPM	500 FPM
ACT-317	10 x 20	9-1/2 x 19-1/2	1	.20	.39
ACT-310	12 x 24	11-3/8 x 23-3/8	2	.20	.39
ACT-345	15 x 20	14-1/2 x 19-1/2	1	.20	.39
ACT-301	16 x 20	15-1/2 x 19-1/2	1	.20	.39
ACT-316	16 x 24	15-3/8 x 23-3/8	2	.20	.39
ACT-302	16 x 25	15-1/2 x 24-1/2	2	.20	.39
ACT-312	18 x 24	17-3/8 x 23-3/8	2	.20	.39
ACT-361	20 x 16	19-1/2 x 15-1/2	1	.20	.39
ACT-303	20 x 20	19-1/2 x 19-1/2	1	.20	.39
ACT-311	20 x 24	19-3/8 x 23-3/8	2	.20	.39
ACT-304	20 x 25	19-1/2 x 24-1/2	2	.20	.39
ACT-306	24 x 12	23-3/8 x 11-3/8	1	.20	.39
ACT-344	24 x 16	23-3/8 x 15-3/8	1	.20	.39
ACT-315	24 x 20	23-3/8 x 19-3/8	1	.20	.39
ACT-305	24 x 24	23-3/8 x 23-3/8	2	.20	.39
ACT-365	25 x 16	24-1/2 x 15-1/2	1	.20	.39
ACT-352	25 x 20	24-1/2 x 19-1/2	1	.20	.39
ACT-325	25 x 25	24-1/2 x 24-1/2	2	.20	.39

STANDARD CONSTRUCTION:

1. Polyester Media With Tack
Dual Layer Media Air Entering Side (White/Green)
Needled Media Layer Air Leaving Side (White)
2. Heat Seal Construction
3. 9 GA Steel Internal Wire Frame
4. Cross Wires Installed in the Width Direction

NOTES:

1. MERV 7 ASHRAE 52.2-1999
2. Final Resistance: 1.0" W.G.
3. Class 2 Filter Per U.L. Standard 900
4. Maximum Operating Temperature: 220 deg. F



1612 N DAVIS AVE
OTTAWA, KS 66067
P: 800-624-8739
F: 785-242-8700

CONTACT FACTORY TO
VERIFY REVISION LEVEL

TOLERANCES UNLESS OTHERWISE SPECIFIED

FRACTIONAL $\pm 1/8"$
DECIMAL -
ANGLES -

ALL DIMENSIONS IN INCHES

DRAWING NAME

ACTIVATOR SERIES 3-PLY RING PANEL FILTER

APPROVED BY

[Signature]

SPECIFICATION NO.

MKT-B-00451

PAGE

1 OF 1

SCALE

NONE

DWG. SIZE

A

REVISION

A

REVISION DATE

11-15-06

CONFIDENTIAL - DO NOT COPY. THIS MATERIAL IS TRADE SECRET AND PROPRIETARY BEING EXCLUSIVELY OWNED BY CLARCOR AIR FILTRATION. THE EXPRESSION OF THE INFORMATION CONTAINED HEREIN IS PROTECTED UNDER FEDERAL COPYRIGHT LAWS AND ALL COPYING IS PROHIBITED AND MAY BE SUBJECT TO CRIMINAL PENALTIES.