


Model Number	Nominal Size (Inches) W x H x D	Actual Size (Inches) W x H x D	Rated Air Flow (CFM)	Initial Resistance (IN W.G.)			Media Area (Square Feet)
				DP-95	DP-85	DP-65	
DP*-210	12 x 24 x 2	11-3/8 x 23-3/8 x 1-3/4	250	.58	.40	.21	5.6
DP*-201	16 x 20 x 2	15-1/2 x 19-1/2 x 1-3/4	280	.58	.40	.21	6.7
DP*-202	16 x 25 x 2	15-1/2 x 24-1/2 x 1-3/4	350	.58	.40	.21	8.4
DP*-203	20 x 20 x 2	19-1/2 x 19-1/2 x 1-3/4	350	.58	.40	.21	8.3
DP*-211	20 x 24 x 2	19-3/8 x 23-3/8 x 1-3/4	418	.58	.40	.21	9.9
DP*-204	20 x 25 x 2	19-1/2 x 24-1/2 x 1-3/4	438	.58	.40	.21	10.3
DP*-205	24 x 24 x 2	23-3/8 x 23-3/8 x 1-3/4	500	.58	.40	.21	11.7

* - Filter Efficiency (95 = 80-85%, 85 = 75-80, 65 = 50-55%)

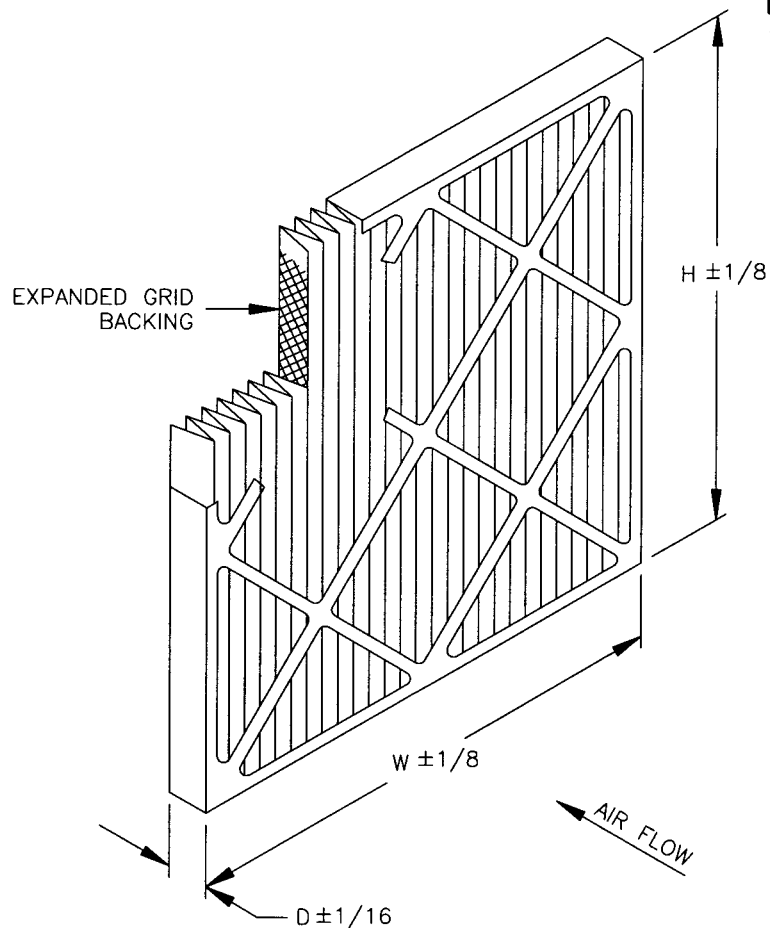

STANDARD CONSTRUCTION

1. High Efficiency, High Loft Microglass Media
2. 10.0 Pleats Per Foot
3. Expanded Metal Pleat Supports
4. Moisture Resistant Beverage Board Frame
5. Double Wall Frame

NOTES

1. Average Efficiency (Media Color):
 DP95: 80-85% ASHRAE 52.1-1992 (Yellow)
 MERV 13 ASHRAE 52.2-1999
 DP85: 75-80% ASHRAE 52.1-1992 (Pink)
 MERV 12 ASHRAE 52.2-1999
 DP65: 50-55% ASHRAE 52.1-1992 (Orange)
 MERV 11 ASHRAE 52.2-1999
2. Final Resistance: 1.2" W.G.
3. Rated Velocity: 125 FPM
4. Class 2 Filter Per U.L. Standard 900
5. Maximum Operating Temperature: 200 deg. F



ONE SOURCE
FOR
AIR FILTRATION
PRODUCTS

P.O. Box 32578
Louisville, KY 40232
P: 502-969-2304
F: 502-961-0930

CONTACT FACTORY TO
VERIFY REVISION LEVEL

TOLERANCES
UNLESS OTHERWISE SPECIFIED

FRACTIONAL
DECIMAL
ANGLES

ALL DIMENSIONS IN INCHES

DRAWING NAME

TYPE DP High Efficiency Pleat (2" Depth)

APPROVED BY

[Signature]

SPECIFICATION NO.

MKT-B-00177

PAGE

1 OF 1

SCALE

NONE

DWG. SIZE

A

REVISION

B


REVISION DATE

03-10-03

CONFIDENTIAL - DO NOT COPY. THIS MATERIAL IS TRADE SECRET AND PROPRIETARY BEING EXCLUSIVELY OWNED BY AIRGUARD. THE EXPRESSION OF THE INFORMATION CONTAINED HEREIN IS PROTECTED UNDER FEDERAL COPYRIGHT LAWS AND ALL COPYING IS PROHIBITED AND MAY BE SUBJECT TO CRIMINAL PENALTIES.

Model Number	Nominal Size (Inches) W x H x D	Actual Size (Inches) W x H x D	Rated Air Flow (CFM)	Initial Resistance (IN W.G.)			Media Area (Square Feet)
				DP-95	DP-85	DP-65	
DP*-410	12 x 24 x 4	11-3/8 x 23-3/8 x 3-3/4	250	.45	.30	.10	10.0
DP*-401	16 x 20 x 4	15-1/2 x 19-1/2 x 3-3/4	280	.45	.30	.10	11.5
DP*-402	16 x 25 x 4	15-1/2 x 24-1/2 x 3-3/4	350	.45	.30	.10	14.3
DP*-403	20 x 20 x 4	19-1/2 x 19-1/2 x 3-3/4	350	.45	.30	.10	14.6
DP*-411	20 x 24 x 4	19-3/8 x 23-3/8 x 3-3/4	418	.45	.30	.10	16.2
DP*-404	20 x 25 x 4	19-1/2 x 24-1/2 x 3-3/4	438	.45	.30	.10	18.3
DP*-405	24 x 24 x 4	23-3/8 x 23-3/8 x 3-3/4	500	.45	.30	.10	19.9

* - Filter Efficiency (95 = 80-85%, 85 = 75-80%, 65 = 50-55%)

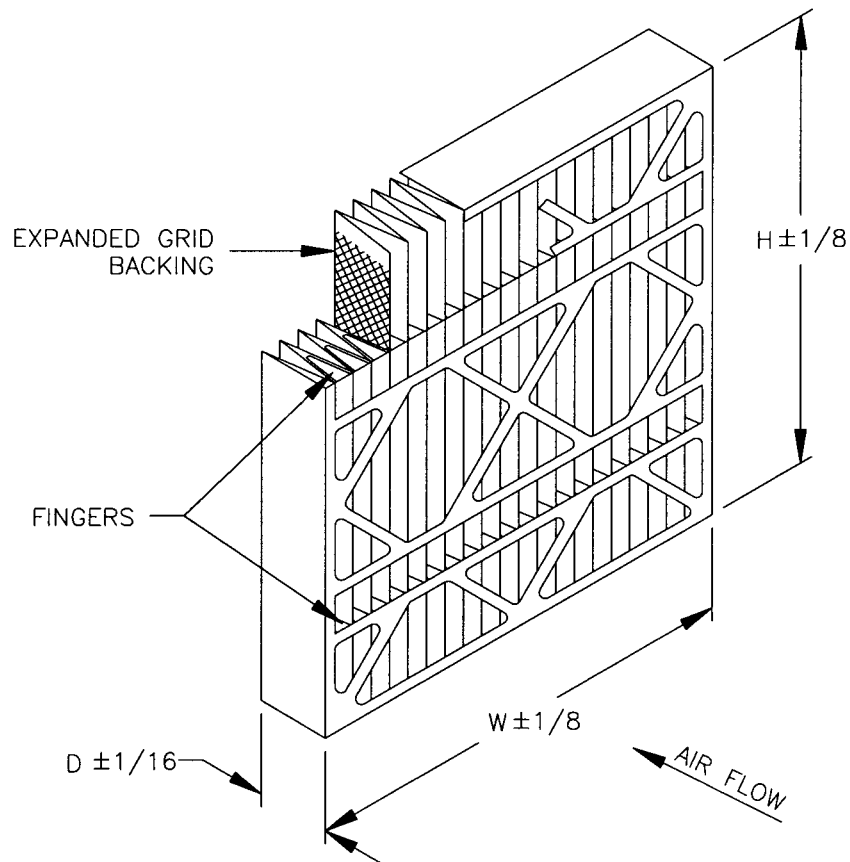

STANDARD CONSTRUCTION

1. High Efficiency, High Loft Microglass Media
2. 8.2 Pleats Per Foot
3. Expanded Metal Pleat Supports
4. Moisture Resistant Beverage Board Frame
5. Double Wall Frame

NOTES

1. Average Efficiency (Media Color):
 - DP95: 80-85% ASHRAE 52.1-1992 (Yellow)
 - MERV 13 ASHRAE 52.2-1999
 - DP85: 75-80% ASHRAE 52.1-1992 (Pink)
 - MERV 12 ASHRAE 52.2-1999
 - DP65: 50-55% ASHRAE 52.1-1992 (Orange)
 - MERV 11 ASHRAE 52.2-1999
2. Final Resistance: 1.2" W.G.
3. DP95 & DP85 Rated Velocity: 125 FPM
DP65 Rated Velocity: 500 FPM
4. Class 2 Filter Per U.L. Standard 900
5. Maximum Operating Temperature: 200 deg. F



ONE SOURCE
FOR
AIR FILTRATION
PRODUCTS

P.O. Box 32578
Louisville, KY 40232
P: 502-969-2304
F: 502-961-0930

CONTACT FACTORY TO
VERIFY REVISION LEVEL

TOLERANCES
UNLESS OTHERWISE SPECIFIED

FRACTIONAL
DECIMAL
ANGLES

ALL DIMENSIONS IN INCHES

DRAWING NAME

TYPE DP High Efficiency Pleat (4" Depth)

APPROVED BY

[Signature]

SPECIFICATION NO.

MKT-B-00178

PAGE

1 OF 1

SCALE

NONE

DWG. SIZE

A

REVISION

B

REVISION DATE

03-10-03

CONFIDENTIAL - DO NOT COPY. THIS MATERIAL IS TRADE SECRET AND PROPRIETARY BEING EXCLUSIVELY OWNED BY AIRGUARD. THE EXPRESSION OF THE INFORMATION CONTAINED HEREIN IS PROTECTED UNDER FEDERAL COPYRIGHT LAWS AND ALL COPYING IS PROHIBITED AND MAY BE SUBJECT TO CRIMINAL PENALTIES.