


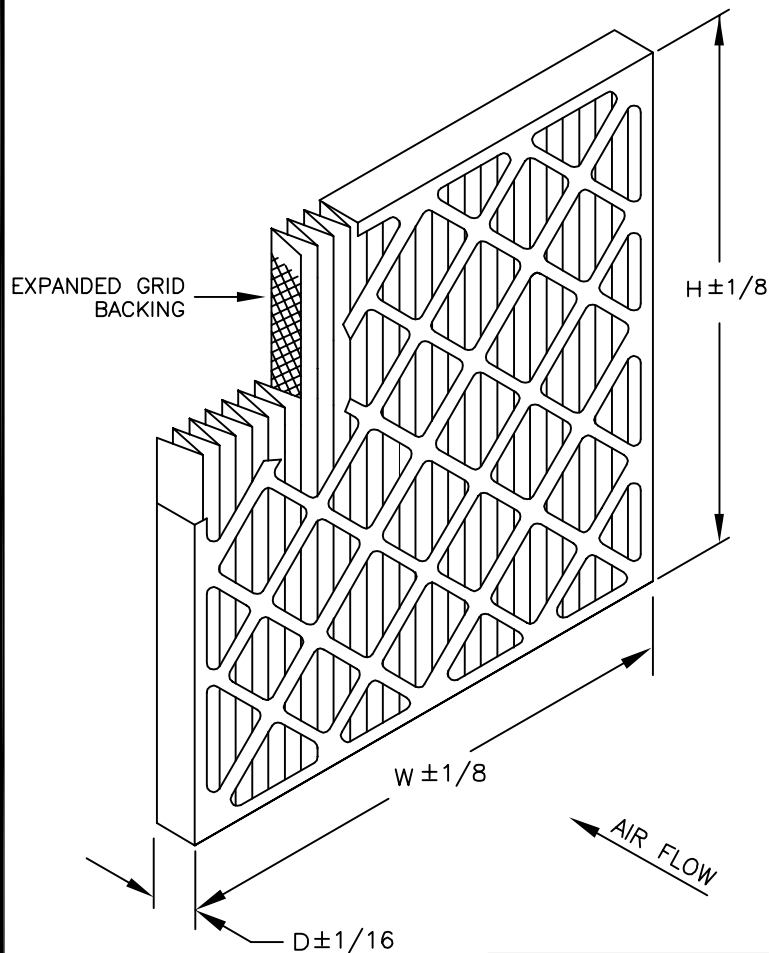

| Model Number  | Nominal Size<br>(Inches)<br>W x H x D | Actual Size<br>(Inches)<br>W x H x D | Rated Air<br>Flow<br>(CFM) | Initial Resistance<br>(IN W.G.) | Media Area<br>(Square Feet) |
|---------------|---------------------------------------|--------------------------------------|----------------------------|---------------------------------|-----------------------------|
| DP13-STD2-217 | 10 X 20 X 2                           | 9-1/2 X 19-1/2 X 1-3/4               | 700                        | .41                             | 7.2                         |
| DP13-STD2-220 | 12 X 20 X 2                           | 11-1/2 X 19-1/2 X 1-3/4              | 840                        | .41                             | 8.8                         |
| DP13-STD2-210 | 12 X 24 X 2                           | 11-3/8 X 19-3/8 X 1-3/4              | 1000                       | .41                             | 10.5                        |
| DP13-STD2-239 | 14 X 20 X 2                           | 13-1/2 X 19-1/2 X 1-3/4              | 980                        | .41                             | 10.4                        |
| DP13-STD2-241 | 14 X 25 X 2                           | 13-1/2 X 24-1/2 X 1-3/4              | 1220                       | .41                             | 13.0                        |
| DP13-STD2-245 | 15 X 20 X 2                           | 14-1/2 X 19-1/2 X 1-3/4              | 1050                       | .41                             | 20.0                        |
| DP13-STD2-201 | 16 X 20 X 2                           | 15-1/2 X 19-1/2 X 1-3/4              | 1120                       | .41                             | 10.9                        |
| DP13-STD2-216 | 16 X 24 X 2                           | 15-3/8 X 19-3/8 X 1-3/4              | 1340                       | .41                             | 13.7                        |
| DP13-STD2-202 | 16 X 25 X 2                           | 15-1/2 X 24-1/2 X 1-3/4              | 1400                       | .41                             | 14.9                        |
| DP13-STD2-280 | 18 X 20 X 2                           | 17-1/2 X 19-1/2 X 1-3/4              | 1250                       | .41                             | 13.0                        |
| DP13-STD2-212 | 18 X 24 X 2                           | 17-3/8 X 23-3/8 X 1-3/4              | 1500                       | .41                             | 15.5                        |
| DP13-STD2-285 | 18 X 25 X 2                           | 17-1/2 X 24-1/2 X 1-3/4              | 1570                       | .41                             | 16.2                        |
| DP13-STD2-203 | 20 X 20 X 2                           | 19-1/2 X 19-1/2 X 1-3/4              | 1400                       | .41                             | 14.5                        |
| DP13-STD2-211 | 20 X 24 X 2                           | 19-3/8 X 23-3/8 X 1-3/4              | 1670                       | .41                             | 17.4                        |
| DP13-STD2-204 | 20 X 25 X 2                           | 19-1/2 X 24-1/2 X 1-3/4              | 1750                       | .41                             | 18.2                        |
| DP13-STD2-232 | 20 X 30 X 2                           | 19-1/2 X 29-1/2 X 1-3/4              | 2080                       | .41                             | 22.3                        |
| DP13-STD2-205 | 24 X 24 X 2                           | 23-3/8 X 23-3/8 X 1-3/4              | 2000                       | .41                             | 21.1                        |
| DP13-STD2-225 | 25 X 25 X 2                           | 24-1/2 X 24-1/2 X 13/4               | 2170                       | .41                             | 23.4                        |

#### STANDARD CONSTRUCTION

1. 100% Synthetic White Media
2. 17.5 Pleats Per Foot
3. Expanded Metal Pleat Supports
4. Moisture Resistant Beverage Board Frame
5. Double Wall Frame

#### NOTES

1. MERV 13 per ASHRAE 52.2-2007, 492 FPM
2. Final Resistance: 1.0" W.G.
3. Rated Velocity: 500 FPM
4. Class 2 Filter Per U.L. Standard 900
5. Maximum Operating Temperature: 200 deg. F



P.O. Box 32578  
Louisville, KY 40232  
P: 866-247-4827  
F: 502-961-0930  
© www.airguard.com

CONTACT FACTORY TO  
VERIFY REVISION LEVEL

#### TOLERANCES UNLESS OTHERWISE SPECIFIED

FRACTIONAL -  
DECIMAL -  
ANGLES -

ALL DIMENSIONS IN INCHES

DRAWING NAME

**DP-GREEN 13 PLEAT 2" DEPTH**

APPROVED BY

*K. Quinn*

SPECIFICATION NO.

**MKT-B-00563**

PAGE

**1 OF 1**

SCALE

**NONE**

DWG. SIZE

**A**

REVISION

**A**

REVISION DATE

**11/05/08**

CONFIDENTIAL - DO NOT COPY. THIS MATERIAL IS TRADE SECRET AND PROPRIETARY BEING EXCLUSIVELY OWNED BY CLC AIR. THE EXPRESSION OF THE INFORMATION CONTAINED HEREIN IS PROTECTED UNDER FEDERAL COPYRIGHT LAWS AND ALL COPYING IS PROHIBITED AND MAY BE SUBJECT TO CRIMINAL PENALTIES.