


MODEL NUMBER	NOMINAL SIZE (INCHES) W x H x D	ACTUAL SIZE (INCHES) W x H x D	RATED AIR FLOW (CFM)	INITIAL RESISTANCE (IN W.G.)	MEDIA AREA (SQ. FT.)
DPMR-210	12x24x2	11-3/8 x 23-3/8 x 1-3/4	1000	0.25	8.6
DPMR-201	16x20x2	15-1/2 x 19-1/2 x 1-3/4	1120	0.25	9.9
DPMR-202	16x25x2	15-1/2 x 24-1/2 x 1-3/4	1400	0.25	12.3
DPMR-203	20x20x2	19-1/2 x 19-1/2 x 1-3/4	1400	0.25	11.9
DPMR-204	20x25x2	19-1/2 x 24-1/2 x 1-3/4	1750	0.25	14.9
DPMR-205	24x24x2	23-3/8 x 23-3/8 x 1-3/4	2000	0.25	17.6

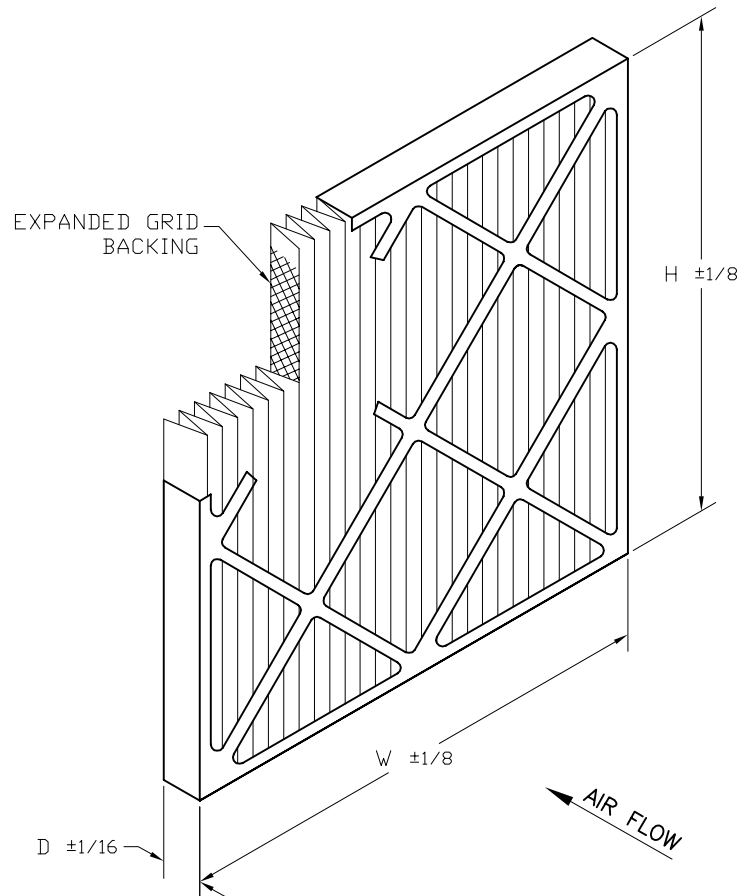

STANDARD CONSTRUCTION


1. POLYESTER MEDIA
2. 14.3 PLEATS PER FOOT
3. EXPANDED METAL PLEAT SUPPORTS
4. MOISTURE RESISTANT BEVERAGE BOARD FRAME
5. DOUBLE WALL FRAME

NOTES:

1. AVERAGE EFFICIENCY: 25-30% ASHRAE 52.1-1992
MERV 7 ASHRAE 52.2-1999
2. FINAL RESISTANCE: 1.0" W.G.
3. RATED VELOCITY: 500 FPM
4. CLASS 2 FILTER PER U.L. STANDARD 900

 ONE SOURCE FOR ALL AIR FILTRATION PRODUCTS A CLARCOR COMPANY	P.O. Box 32578 Louisville, KY 40232 P: 502-969-2304 F: 502-966-9842	TOLERANCES UNLESS OTHERWISE SPECIFIED FRACTIONAL ±1/32 DECIMAL ±0.03 ANGLES ±1°				DRAWING NAME MIST-DEFIER (2" DEPTH)			
		ALL DIMENSIONS IN INCHES ♦ DENOTES CRITICAL DIMENSION		APPROVED BY SPECIFICATION NO. D01-RD-148003		PAGE 1 OF 1			
CONTROLLED DOCUMENT IF THIS DOCUMENT IS NOT "BUFF" IN COLOR, IT MAY NOT BE CURRENT.		SCALE NONE		DWG. SIZE A		REVISION A		REVISION DATE 11-7-05	
CONFIDENTIAL - DO NOT COPY. THIS MATERIAL IS TRADE SECRET AND PROPRIETARY BEING EXCLUSIVELY OWNED BY AIRGUARD. THE EXPRESSION OF THE INFORMATION CONTAINED HEREIN IS PROTECTED UNDER FEDERAL COPYRIGHT LAWS AND ALL COPYING IS PROHIBITED AND MAY BE SUBJECT TO CRIMINAL PENALTIES.									

MODEL NUMBER	NOMINAL SIZE (INCHES) W x H x D	ACTUAL SIZE (INCHES) W x H x D	RATED AIR FLOW (CFM)	INITIAL RESISTANCE (IN W.G.)	MEDIA AREA (SQ. FT.)
DPMR-410	12x24x4	11-3/8 x 23-3/8 x 3-3/4	1000	0.23	12.4
DPMR-401	16x20x4	15-1/2 x 19-1/2 x 3-3/4	1120	0.23	14.6
DPMR-402	16x25x4	15-3/8 x 24-3/8 x 3-3/4	1400	0.23	18.3
DPMR-403	20x20x4	19-1/2 x 19-1/2 x 3-3/4	1400	0.23	18.8
DPMR-404	20x25x4	19-1/2 x 24-1/2 x 3-3/4	1750	0.23	23.5
DPMR-405	24x24x4	23-3/8 x 23-3/8 x 3-3/4	2000	0.23	26.1

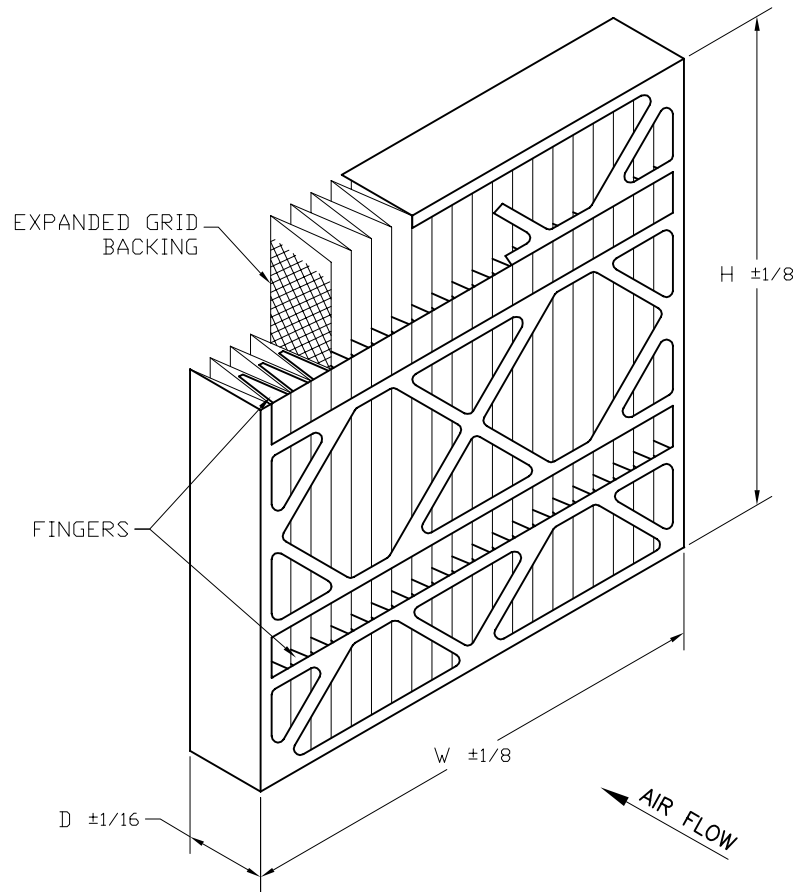

STANDARD CONSTRUCTION

1. POLYESTER MEDIA
2. 10.8 PLEATS PER FOOT
3. EXPANDED METAL PLEAT SUPPORTS
4. MOISTURE RESISTANT BEVERAGE BOARD FRAME
5. DOUBLE WALL FRAME
6. (2) ROWS OF FINGERS ON AIR ENTERING SIDE

NOTES:

1. AVERAGE EFFICIENCY: 25-30% ASHRAE 52.1-1992
MERV 7 ASHRAE 52.2-1999
2. FINAL RESISTANCE: 1.0" W.G.
3. RATED VELOCITY: 500 FPM
4. CLASS 2 FILTER PER U.L. STANDARD 900



ONE SOURCE
FOR ALL
AIR FILTRATION
PRODUCTS

P.O. Box 32578
Louisville, KY 40232
P: 502-969-2304
F: 502-966-9842

CONTROLLED DOCUMENT

IF THIS DOCUMENT IS NOT "BUFF" IN COLOR,
IT MAY NOT BE CURRENT.

TOLERANCES UNLESS OTHERWISE SPECIFIED

FRACTIONAL $\pm 1/32$
DECIMAL ± 0.03
ANGLES $\pm 1^\circ$

ALL DIMENSIONS IN INCHES

♦ DENOTES CRITICAL DIMENSION

DRAWING NAME

MIST-DEFIER (4" DEPTH)

APPROVED BY

SPECIFICATION NO.

D01-RD-148004

PAGE

1 OF 1

SCALE

NONE

DWG. SIZE

A

REVISION

A

REVISION DATE

11-7-05

CONFIDENTIAL - DO NOT COPY. THIS MATERIAL IS TRADE SECRET AND PROPRIETARY BEING EXCLUSIVELY OWNED BY AIRGUARD. THE EXPRESSION OF THE INFORMATION CONTAINED HEREIN IS PROTECTED UNDER FEDERAL COPYRIGHT LAWS AND ALL COPYING IS PROHIBITED AND MAY BE SUBJECT TO CRIMINAL PENALTIES.